

DISCONNECT POWER CORD BEFORE SERVICING
IMPORTANT - RECONNECT ALL GROUNDING DEVICES
All parts of this appliance capable of conducting electrical current are grounded. If grounding wires, screws, straps, clips, nuts or washers used to complete a path to ground are removed for service, they must be returned to their original position and properly fastened.

ELECTRICAL SPECIFICATIONS

Thermistor calibration:
kilo-ohm resistance

@ 0 °F (-18 °C) 42.5k ohms
@ 37 °F (3 °C) 14.0k ohms
@ 77 °F (25 °C) 4.92k ohms

Defrost Control

Adaptive System

Overtemperature Thermostat 140°-110°F (60°-43°C)

ELECTRICAL RATING

Maximum Current Leakage 0.75 mA
Maximum Ground Path Resistance 0.14 Ohms

NO LOAD PERFORMANCE

Control Position 5/5 and Ambient of 85-90 °F (21-32 °F)

Fresh Food 34-41°F (1 to 5°C)

Frozen Food -3 to 3°F (-19 to -16°C)

Run Time, % @ 85°F (21°C) Ambient 23 to 35%

Run Time, % @ 90°F (32°C) Ambient 48 to 60%

REFRIGERATION SYSTEM

Refrigerant Charge See Rating Plate 900-980 BTU/hr See Rating Plate 800 BTU/hr

Compressor 21°-26° Hg (Global 956 BTU/hr) (Global 956 BTU/hr) 21°-26° Hg

Minimum Compressor Capacity

Minimum Equalized Pressure
@ 65°F (21°C) 55 PSIG (370KPa) 55 PSIG (370KPa)
@ 90°F (32°C) 63 PSIG (434KPa) 63 PSIG (434KPa)

IMPORTANT SAFETY NOTICE

This information is intended for use by individuals possessing adequate backgrounds of electrical, electronic and mechanical experience. Any attempt to repair a major appliance may result in personal injury and property damage. The manufacturer or seller cannot be responsible for the interpretation of this information, nor can it assume any liability in connection with its use.

INSTALLATION




Clearance must be provided for air circulation

At Top 1" (25mm)

At Sides 0.13" (3.3mm)

At Rear 1" (25mm)

AIR FLOW

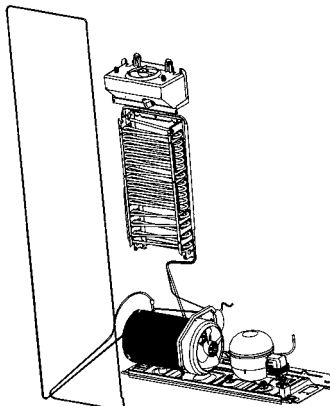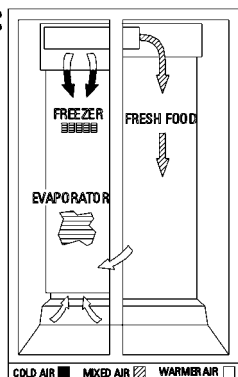


187D4106P090

187D4106P090



187D4106P090

187D4106P090


1613B

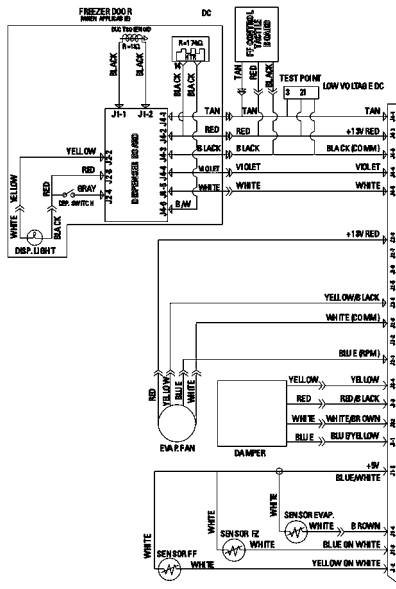

MAIN CONTROL BOARD



WHERE APPROPRIATE

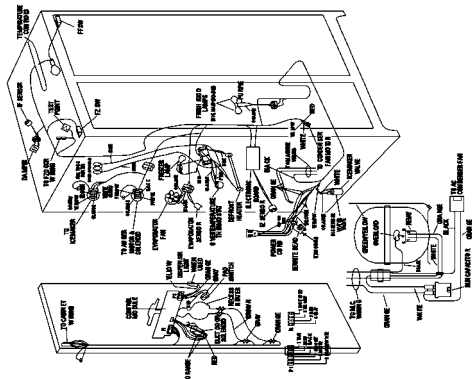

187D4106P090

187D4106P090

187D4106P090

187D4106P090